



Features

- Heavy Duty Construction
- Allen Bradley Compact Logix PLC
- Adjustable Tray Magazine
- Interlocked Barrier Guarding
- Automatic Can & Pack Collation
- Nordson/ITW Hot Melt System
- Elevated Frame For Sanitation
- Tray & Product Photo-Eyes
- Casters and Leveling Legs
- #60 Corrosion Resistant Flight Chain
- Servo Product Loader (Allen Bradley Kinetix)
- Servo Pack Collation
- Reciprocating Tray Erector
- Optional Date Coding Systems
- Capable of: Cartons, Paktech, Hi-Cone Bottle Packs, Loose Cans

www.switchbackgroup.com



TP-15 Traypacker



Specifications

TP-15

Tray Range
 Minimum: 4-count 12/16 oz.
 Maximum: 24-count 12/16 oz.
 3" maximum depth

Packaging Material
 Corrugated


Package Type
 End Load with Glue Style Flaps

Main Voltage
 240VAC-3 Phase-60 Hz
 480VAC-3 Phase-60 Hz (Optional)


Control Voltage
 24VDC (Optional 120VAC)

Speed Range
 Up to 16 Trays Per Minute

Air Consumption
 30 CFM @ 80 PSI

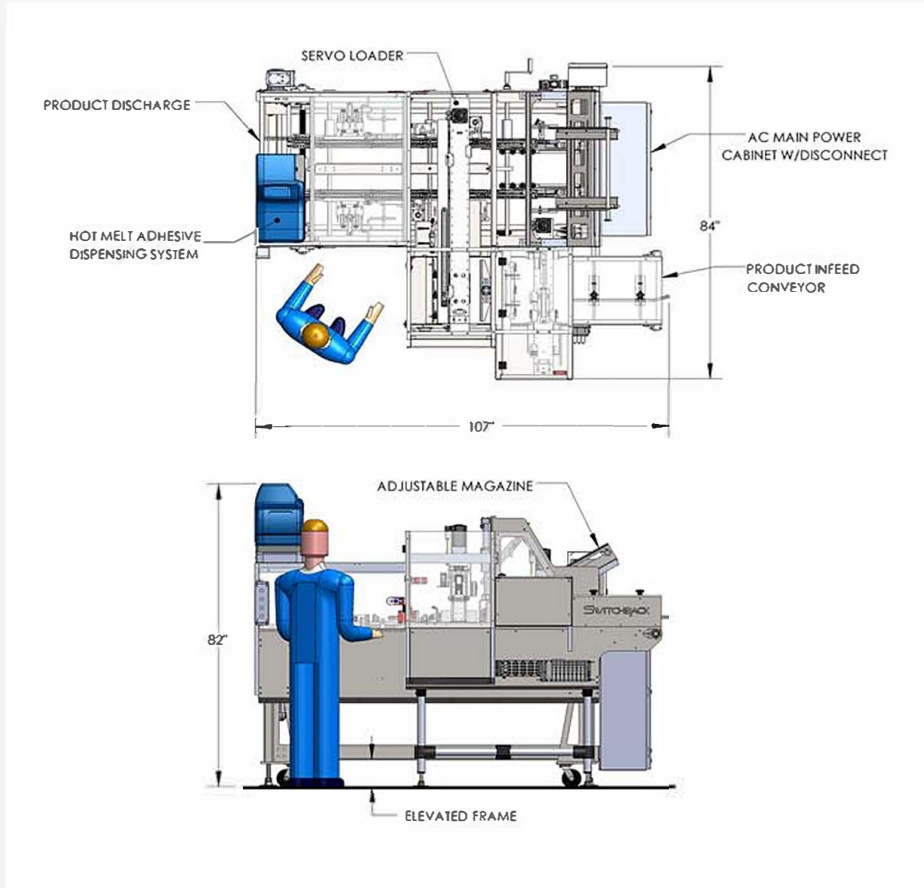

Tray Style

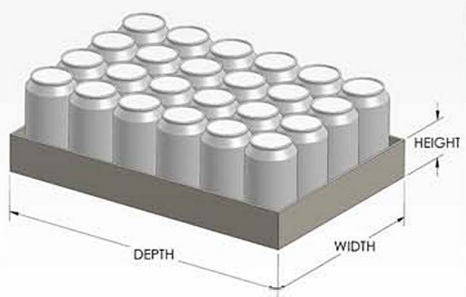

Designed to Perform

With the ability to run multiple products and multiple pack patterns the TP-15 offers the ultimate flexibility for customers.

Ethernet based Allen Bradley PLC, variable frequency drives and servo loader allow for product control throughout the machine cycle, with recipe storage available on the color touch screen.

Sales Office

Factory Information

Switchback Group, Inc.
 3778 Timberlake Drive
 Richfield, OH 44286
 P (330) 523-5200
 F (330) 523-5212
www.switchbackgroup.com