



RECIPROCATING CASE BLANK ERECTOR

Features

- Pass-Through Construction
- Extended Motorized Case Magazine
- Interlocked Barrier Guarding
- CompactLogix PLC Controller
- OEM Hot Melt Glue System
- Elevated Frame For Sanitation
- Mechanical or Servo Indexing
- Color Touch Screen
- Casters and Leveling Legs
- Detent Jam Protection Clutch
- Case Carrier Flight Chain
- 2 HP AC Inverted Drive Motor
- Servo Product Loader
- Up To 25 Cases per Minute
- Optional Case Coding

www.switchbackgroup.com



Optional Wash-Down Series

Servo Driven Product Loader

WA-25 Intermittent Motion Wraparound Casepacker



SERVO PRODUCT LOAD AXIS



HEAVY DUTY TOOLED PRODUCT BUCKETS

Specifications

Case Range (LWD)

Minimum: 6" x 3" x 6"
Maximum: TBD

Packaging Material

Heavy Chipboard
F-Flute Corrugated
E-Flute Corrugated
B-Flute Corrugated
C-Flute Corrugated

Main Voltage

240VAC-3 Phase-60 Hz
480VAC-3 Phase-60 Hz (Optional)
Other Voltage Available

Control Voltage

24VDC (Optional 120VAC)

Speed Range

3-25 Cases Per Minute


Air Consumption

45 CFM @ 80 PSI

Floor Space


74" Width (1880mm)
132" Length (3353mm)
78" Height (1981mm)
68 Square Feet

WA-25

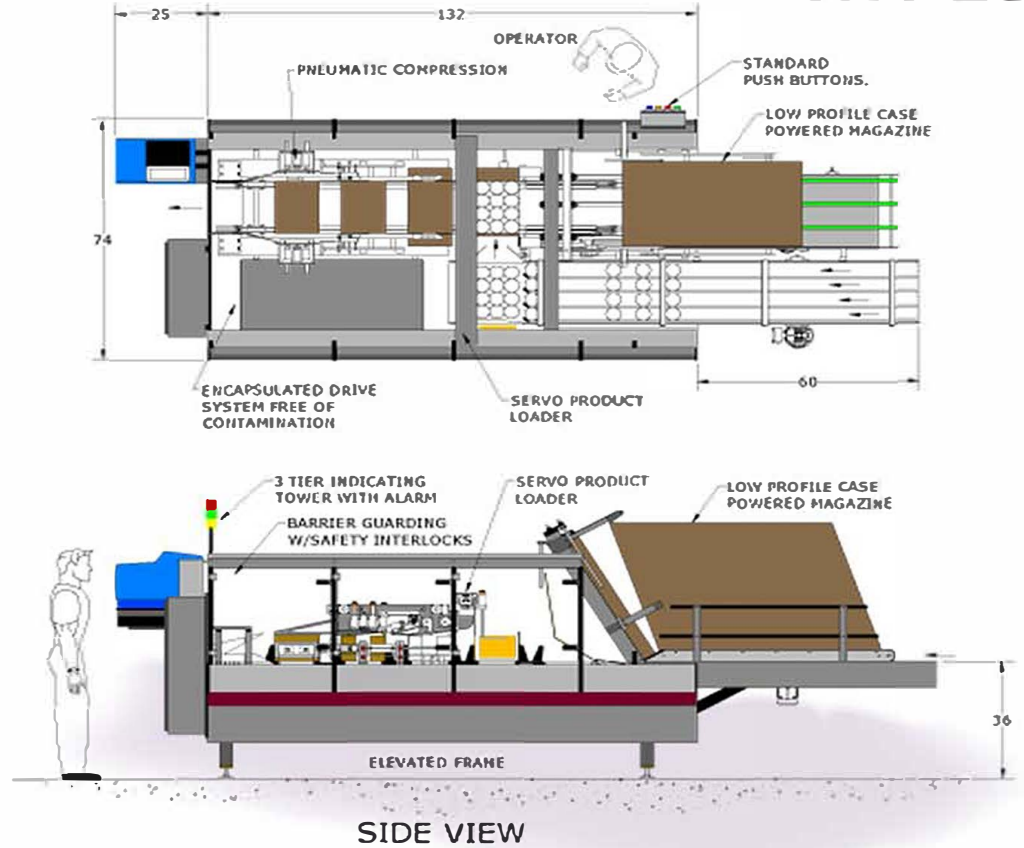

SIDE VIEW

Case Style



Designed to Perform

With its small footprint, the WA-25 is ideal for tight production areas. Its low-level, ergonomically-friendly horizontal magazine enables easy loading of case blanks. The standard magazine is motorized and has a large capacity. The case is drawn from the magazine with vacuum operated, mechanical pick arms. The innovative design of the WA-25 ensures that timing is never lost between critical devices. Reliability and continuous production is our goal.

For further information, call one of our qualified salespersons or equipment representatives and let us put together a plan to get your company started in the direction of quality and performance.

Sales Office

Factory Information

Switchback Group, Inc.
3778 Timberlake Drive
Richfield, OH 44286
P (330) 523-5200
F (330) 523-5212
www.switchbackgroup.com