



Features

- Pass-Through Construction
- 160 Cnt. Motorized Magazine
- Interlocked Barrier Guarding
- AB MicroLogix PLC Controller
- Pressurized Hot Melt System
- Elevated Frame For Sanitation
- AC Vector Motion Technology
- Casters and Leveling Legs
- Case Carrier Flight Chain
- 2 HP Vector Drive Motor
- Vector Driven Product Loader
- Up To 25 Cases per Minute
- Optional Case Coding



Optional Wash-Down Series

**Vector Driven
Product Loader**

CP-25

**Intermittent Motion
End Load Casepacker**



CASE ERECT AND LOAD



200 CNT. CASE MAG.

Specifications

Case Range (LWD)

Minimum: 6 x 3 x 6
Maximum: 14 x 8 x 14

Packaging Material

Heavy Chipboard
F-Flute Corrugated
E-Flute Corrugated
B-Flute Corrugated
C-Flute Corrugated

Main Voltage

240VAC-3 Phase-60 Hz
480VAC-3 Phase-60 Hz (Optional)

Control Voltage

24VDC (Optional 120VAC)

Speed Range

3-25 Cases Per Minute


Air Consumption

15 CFM @ 80 PSI

Floor Space

74" Width (1880mm)
132" Length (3353mm)
78" Height (1981mm)
68 Square Feet

CP-25

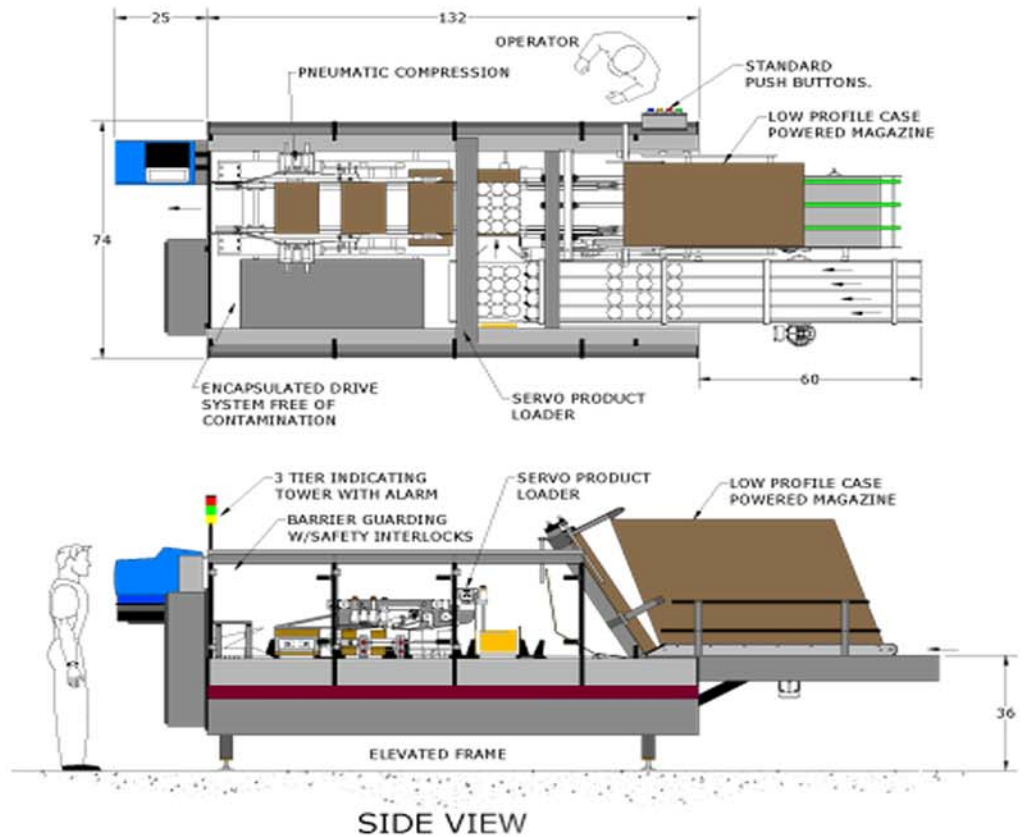

Case Style



Designed to Perform

With its small footprint, the CP-25 is ideal for tight production areas. Its low-level, ergonomically-friendly horizontal magazine enables easy loading of case blanks. The standard magazine is motorized and has a 200 case capacity. The case is drawn from the magazine with vacuum operated, mechanical pick arms. The innovative design of the CP-25 ensures that timing is never lost between critical devices. Reliability and continuous production is our goal.

For further information, call one of our qualified salespersons or equipment representatives and let us put together a plan to get your company started in the direction of quality and performance.

Sales Office

Factory Information

Switchback Group, Inc.
3778 Timberlake Drive
Richfield, OH 44286
P (330) 523-5300
F (330) 523-5212
www.switchbackgroup.com